




AC BRUSHLESS SERVOMOTORS - DSM5.2x

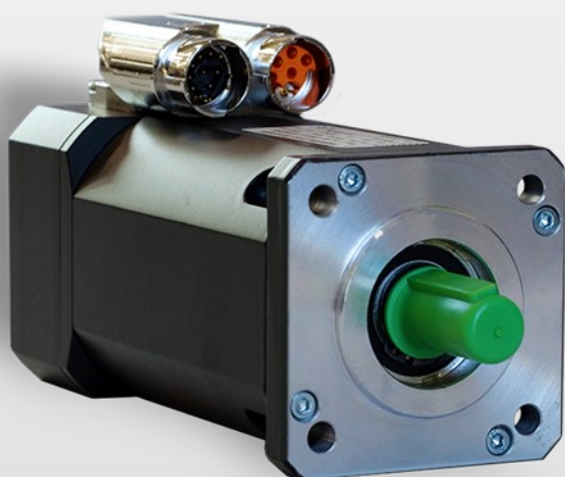

DSM5 - size TWO Brushless Servomotors are AC PM Synchronous servomotors. They have been designed using the latest generation of magnets and construction techniques to provide very high performance, low cogging and torque ripple. They can be supplied with resolver or Incremental / absolute encoder.


Their main characteristics are:

- Frame size 60 mm
- Rare earth magnets for high performance
- 8 pole construction for high torque density
- Low cogging and torque ripple
- Sinusoidal back EMF
- Integrated PTC thermal protection
- Rotatable connectors
- Compact design
- High IP rating
- Smooth finish

Technical Data

Tab .1

Description Winding code	Symbol	Motor	DSM5.21		DSM5.22		DSM5.23	
		Units	1	2	1	2	1	2
Stall Torque	M_0	Nm	0,7		1,4		2,0	
Maximum Torque	M_{pk}	Nm	2,4		4,6		6,7	
Stall current	I_0	A	1,57	0,96	1,57	0,96	4,6	2,7
Peak current	I_{pk}	A	6,4	3,9	6,4	3,9	19	11
Maximum mechanical revs	N_{mec}	min^{-1}	8500		8500		8000	
Maximum revs @ 230Vac	N_{MAX}	min^{-1}	6200	3600	6200	3600	6200	3600
Maximum revs @ 400Vac	N_{MAX}	min^{-1}	8000	6000	8000	6000	8000	6000
Voltage constant	K_E	V/krpm	27	44	27	44	27	45
Torque constant	K_T	Nm/A	0,45	0,73	0,45	0,73	0,45	0,75
Rotor Inertia	J_R	$kg\ cm^2$	0,13		0,23		0,29	
Resist. @ 20°C	R_{U-V}	Ohm	8,6	23	8,6	23	2	5,8
Induct. @ 1 kHz	L_{U-V}	mH	10	27	10	27	3,5	9,8
Mass	m	kg	1,2		1,7		2,2	

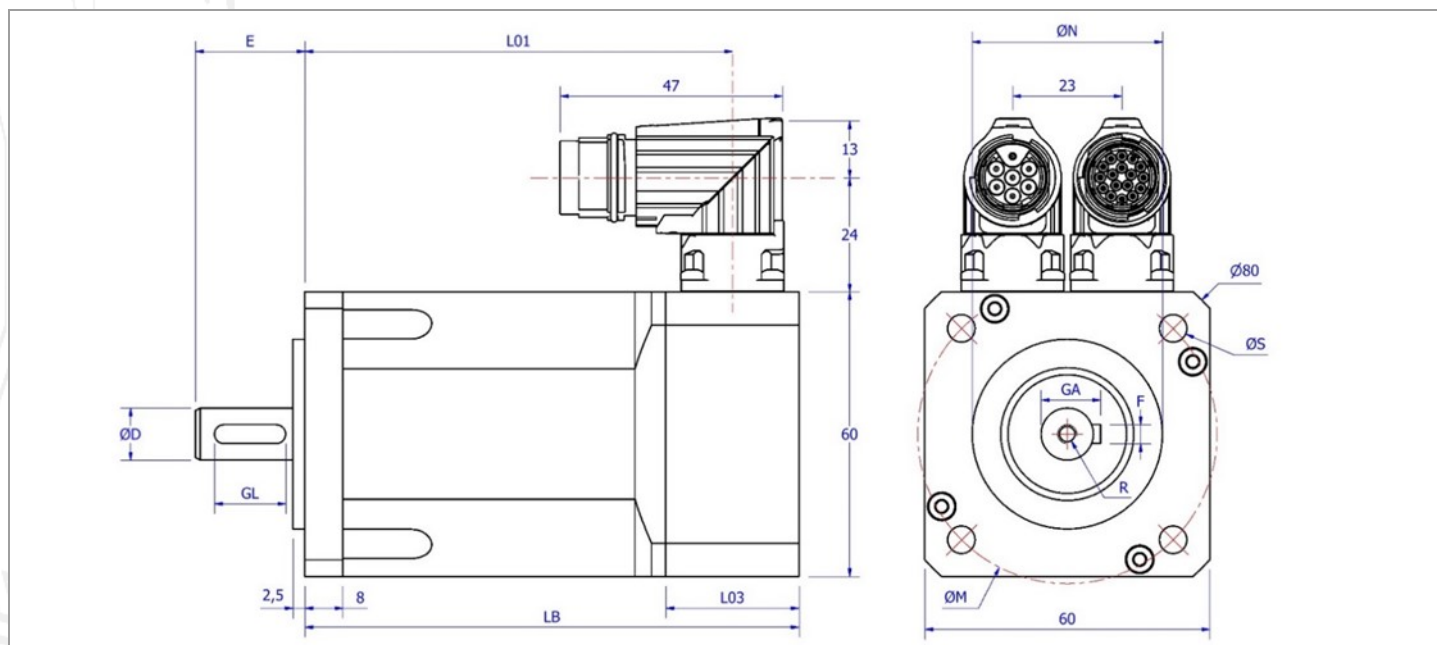

Dimension in mm

Tab. 2

Feedback device	EQI1131, TTL 4096/8192ppr, Resolver, SEL37, ME29			TTL 2048ppr			SKM36/EKS36/EKM36		
Dimension	LB	L01	L03	LB	L01	L03	LB	L01	L03
DSM5.21	104	90	28	108	94	32	122	106	46
DSM5.22	132	118		136	122		150	134	
DSM5.23	160	146		164	150		178	162	
DSM5.21 Brake	134,4	120,4		138,4	124,4		152,4	136,4	
DSM5.22 Brake	162,4	148,4		166,4	152,4		180,4	164,4	
DSM5.23 Brake	190,4	176,4		194,4	180,4		206,4	192,4	

Dimension in mm

Tab. 3

Flange	40/63	56B14	50/70
N	40j6	50j6	50j6
M	63	65	70
S	5,8	M5	5,5
T	2,5	3	3

Dimension in mm

Tab. 4

Shaft	Dimension		
D	9j6	11j6	14j6
E	20	23	30
GL	12	16	20
F	3	4	5
R	M3x8	M4x10	M5x15

INFORMATION - Bold data refers to standard version dimensions.

The following accessories are available on request:

- Max ambient temperature 40° C
- Min ambient temperature 0 °C
- Max Altitude 1000 m (above sea level)
- Insulation class F (materials F & H)
- RMS values
- Insulation system conforms to UL
- IP65 enclosure protection with shaft seal
- Motor Installation B5 – V5
- Cooling IC410
- Typical tolerance value ±10%
- Continuous ratings apply with a rise of $\Delta T=100K$ on the windings when fitted on an aluminium plate with dimensions 254 x 254 x 8mm

Sangalli reserves the right to amend the specification of this product without prior notification.

PART NUMBER COMPOSITION

1	2	3	4	5	6	7	8	9	10	11	12
D	S	M	5	2	2	1	1	4	8	x	x

POS. DESCRIPTION

- 1-3 **Product**
DSM = PM synchronous motor, self-cooled
- 4 **Motor type**
Series 5
- 5 **Motor size**
Size Two
- 6 **Motor length**
1 = Mo 0,70 Nm
2 = Mo 1,40 Nm
3 = Mo 2 Nm
- 7 **Voltage**
1 = Winding code 1
2 = Winding code 2
- 8 **Holding brake**
0 = Without brake
1 = Permanent Magnet Brake $24 \pm 6\% V_{DC}$ $M_{br} = 2Nm$ $11W$ $J_{br} = 0,1kgcm^2$ $m = 300g$
- 9 **Feedback**
0 = Sensorless
3 = Heidenhain Encoder EQI1131 Endat Multi Turn 2.2
4 = Incremental Encoder 2048 PPR + hall
9 = Resolver 2p 7V 10KHz
C = Encoder Sangalli Servomotori ME29 Biss-C MT at battery cell
L = Sick encoder SEL37 Hiperface Multi turn
W = Sick encoder EKS36 18bit NO SIL, DSL
Y = Sick encoder EKM36 18bit Multi turn NO SIL, DSL
Z = Sick encoder SKM36 Hiperface 128i PPT Multi turn

Available on request SIL option on some types of encoders
- 10 **Connection type**
1 = Cable gland + cable 30-40 cm
8 = M17 7 poles power connector / M17 90° feedback
B = M15 ITEC single connector 9 poles
- 11-12 **Special version** (Below some examples, for further details please contact our technical support.)
48 = Shaft 14 x 30mm and Flange 50/70mm (spigot/PCD)
62 = Shaft 9 x 20mm
66 = IP65 Shaft Protection
90 = Thermal protection PT1000
xx = Special Shaft and Flanges (on request)



SANGALLI SERVOMOTORI

MOTORS & MOTION CONTROL

DSM5 BRUSHLESS SERVOMOTORS

DSG SYNCHRONOUS PM GENERATORS

RARE EARTH SC DC SERVOMOTORS

DSW WATER-COOLED

LOW-COST SOLUTIONS

PLANETARY GEARS

CUSTOMISED SOLUTIONS

TORQUE MOTORS

FRAMELESS SPINDLE MOTORS



SANGALLI SERVOMOTORI S.r.l.

Gruppo ESAUTOMOTION SPA

STRADA DEI BOSCHI, 10 - 20852 - VILLASANTA (MB) – ITALY

TEL. 1: +39 039 2020322 - TEL. 2: +39 039 2020747

EMAIL: INFO@SANGALLISERVOMOTORI.IT

WEB: WWW.SANGALLISERVOMOTORI.IT

